


Product Sync for Kit specification

- ×
- To sync kit Specification, you need to navigate to stock item screen.
- You need to create a Parent and child items.
- Enable the [is a kit].

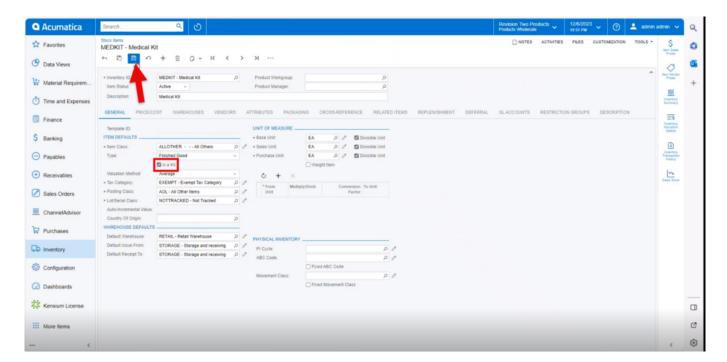


Stock item

• Upon creating stock item navigate to kit specifications screen





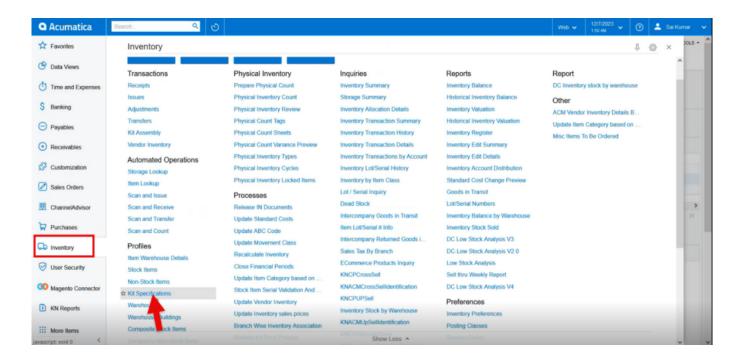


Kit Specifications

- You need to search from the Kit inventory ID.
- Click on [+] icon and add or search for Kit components.
- Click on [Save].





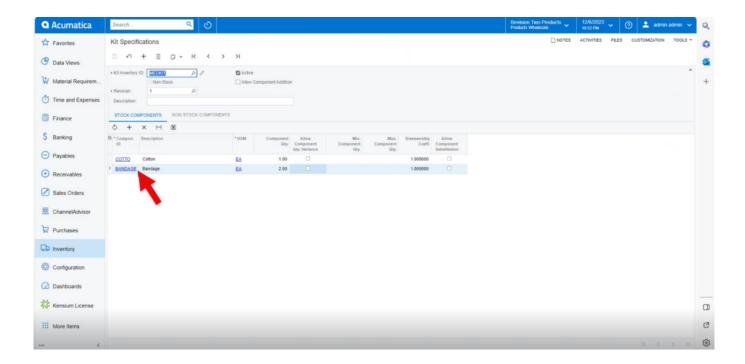


Kit Specifications

- Upon selecting the kit specification sync the product to Rithum Connector.
- Double click on the child item.





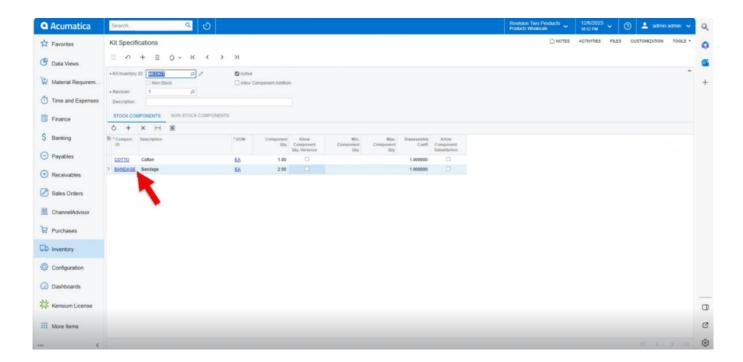


Kit Specifications

- You will navigate to stock item screen click on [Attribute] Tab and [Active] the check box.
- Click on [Save].





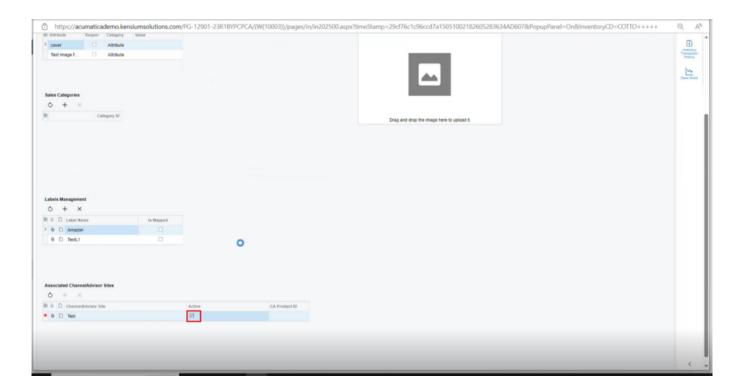


Kit Specifications

• Navigate to Channel Advisor Connector and then click on [Product Sync].





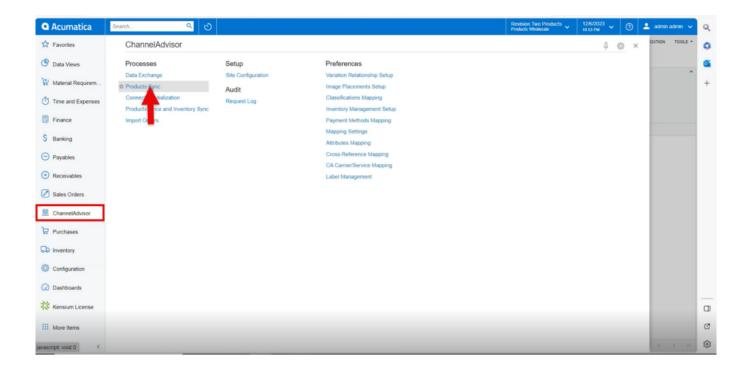


Product Sync

- Enable the check box.
- Click on [Process].





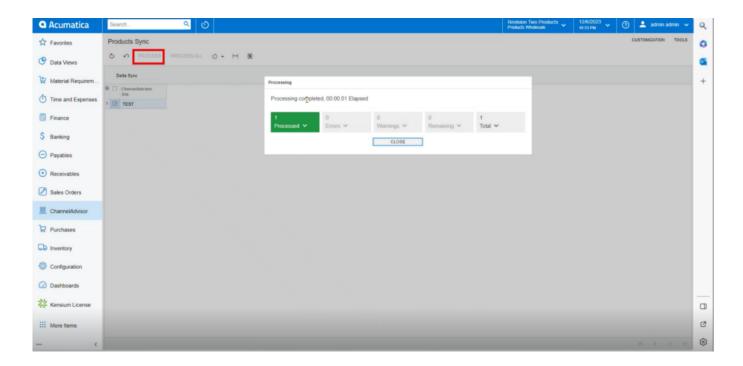


Click on Process

In the channel Advisor Connector you can view the product sync parent item as **[Bundle]** and kit item as **[Standard]**.





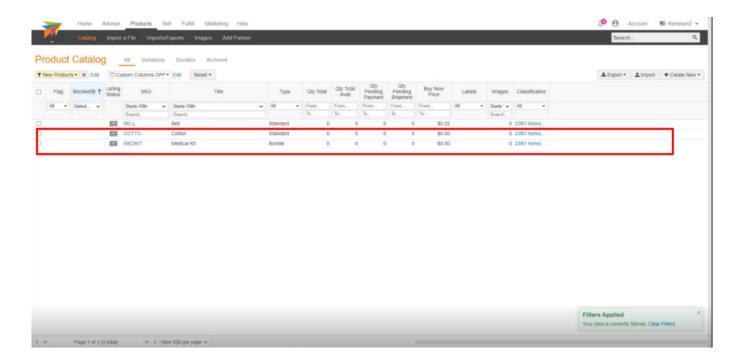


Product Sync in Channel Advisor Connector

- Once the Stock item is available in Rithum Connector. You must generate **[CA Product ID]** in Acumatica.
- The **[CA product ID]** indicates the availability of the specific stock item in the Rithum Connector.
- You need to navigate to the left panel of Acumatica and click on [Rithum Connector] and then click on [Data Exchange] under [Processes].
- You must select [Action] [Retrieve Product IDs in Rithum Connector] from the dropdown menu.





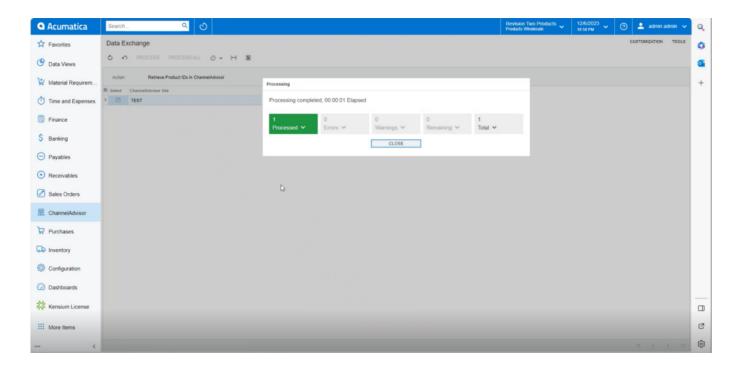


Product Sync in Channel Advisor

• [CA Product ID] is generated for parent item.





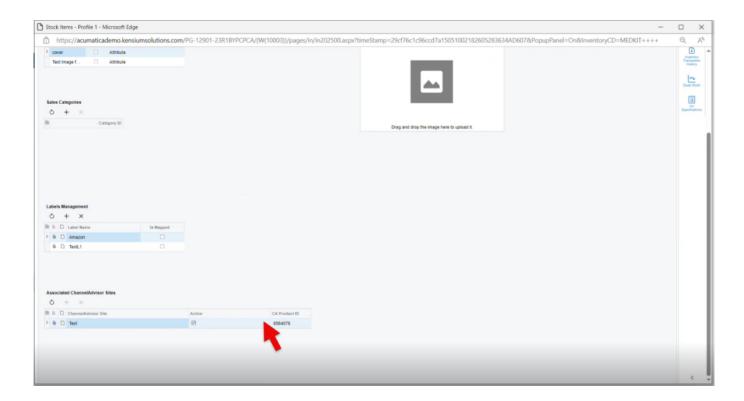

Product Sync in Channel Advisor Connector

